

TO-92 Plastic-Encapsulate Transistors

BCX38 TRANSISTOR (NPN)

FEATURES

- High DC Current Gain

TO – 92

1.EMITTER

2.BASE

3.COLLECTOR 1₂3

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)



Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	80	V
V_{CEO}	Collector-Emitter Voltage	60	V
V_{EBO}	Emitter-Base Voltage	10	V
I_c	Collector Current -Continuous	0.8	A
P_c	Collector Power Dissipation	625	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	200	°C/W
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~+150	°C

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C= 0.01\text{mA}, I_E=0$	80			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C=10\text{mA}, I_B=0$	60			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=0.01\text{mA}, I_C=0$	10			V
Collector cut-off current	I_{CBO}	$V_{CB}=60\text{V}, I_E=0$			0.1	µA
Emitter cut-off current	I_{EBO}	$V_{EB}=8\text{V}, I_C=0$			0.1	µA
DC current gain	$h_{FE(1)}^*$	$V_{CE}=5\text{V}, I_C=100\text{mA}$				
		BCX38A	500			
		BCX38B	2000			
		BCX38C	5000			
	$h_{FE(2)}^*$	$V_{CE}=5\text{V}, I_C=500\text{mA}$				
		BCX38A	1000			
		BCX38B	4000			
		BCX38C	10000			
Collector-emitter saturation voltage	$V_{CE(\text{sat})}^*$	$I_C=800\text{mA}, I_B=8\text{mA}$			1.25	V
Base-emitter voltage	V_{BE}^*	$I_C=800\text{mA}, V_{CE}=5\text{V}$			1.8	V


*Pulse test

TO-92 Package Outline Dimensions

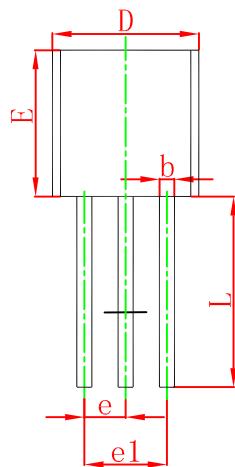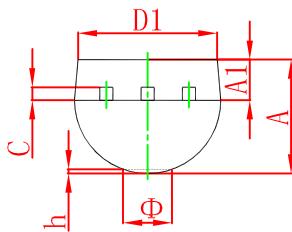

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.400	4.700	0.173	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015


TO-92 Suggested Pad Layout

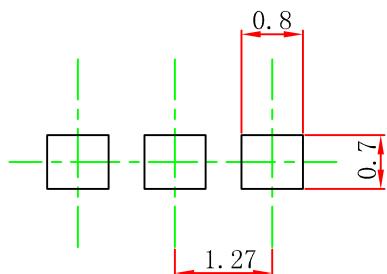


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

TO-92 PACKAGE TAPEING DIMENSION

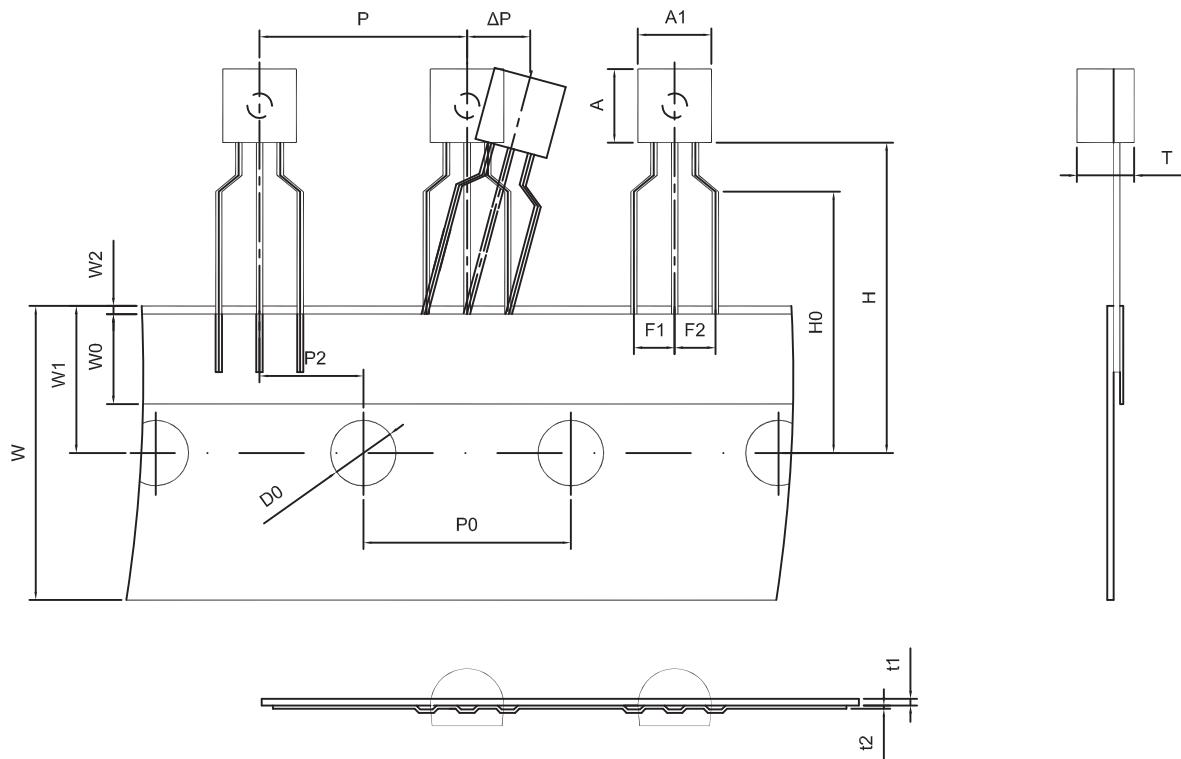

Dimensions are in millimeter									
A1	A	T	P	P0	P2	F1	F2	W	
4.5±0.2	4.5±0.2	3.5±0.2	12.7±0.3	12.7±0.2	6.35±0.3	2.5±0.3	2.5±0.3	18.0+1.0/-0.5	
W0	W1	W2	H	H0	D0	t1	t2	ΔP	
6.0±0.5	9.0±0.5	1.0 MAX.	19.0±1.0	16.0±0.5	4.0±0.5	0.4±0.05	0.2±0.05	0 ± 1.0	

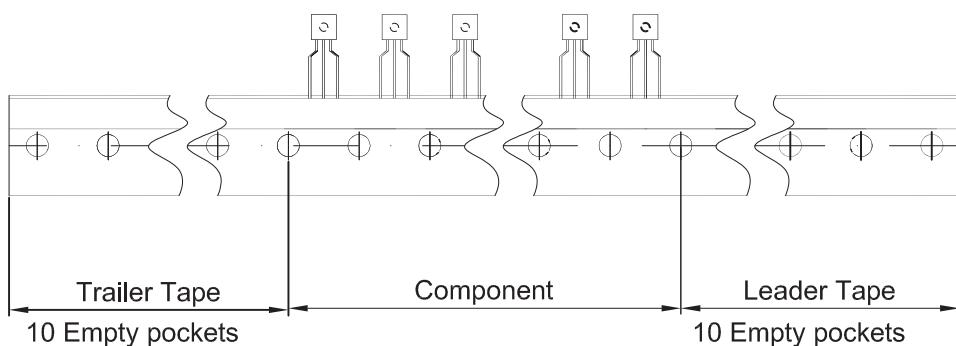

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250