

1N4001FL THRU 1N4007FL

SURFACE MOUNT GENERAL PURPOSE SILICON RECTIFIERS

Forward current-1.0A

Reverse voltage-50V to1000V

FEATURES


- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ Low profile package
- ◆ Ideal for automated placement
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

MECHANICAL DATA

- ◆ Case:SOD-123FL molded plastic body
- ◆ Terminals:Solderable per MIL-STD-750,Method 2026
- ◆ Weight: : Approximated 0.015 grams

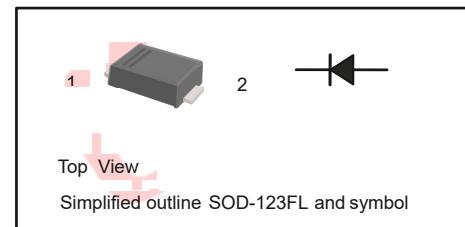

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %

PARAMETER	SYMBOL	1N4001FL	1N4002FL	1N4003FL	1N4004FL	1N4005FL	1N4006FL	1N4007FL	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T _C =125°C	I _{F(AV)}					1			A
Peak Forward Surge Current (Note1)	I _{FSM}					30			A
Maximum Forward Voltage at 1.0A	V _F				1.1				V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _A =25°C T _A =125°C	I _R				5 50				uA
Junction Capacitance (Note2)	C _J				11				pF
Thermal Resistance (Note3)	R _{θJA}				90				°C/W
Operating and Storage Temperature Range	T _J ,T _{STG}				-55 to +150				°C

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method) .

2. Measured at 1MHz and applied reverse voltage of 4.0 D.C.

3. P.C.B.mounted with 2.0 " × 2.0 " (5×5 cm) copper pad areas.

Dated: 04/2016
Rev:1.0

1N4001FL THRU 1N4007FL

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

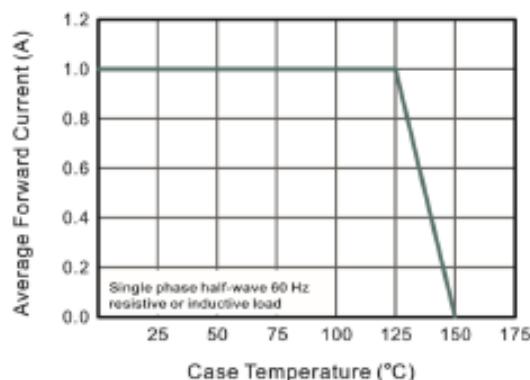


Fig.2 Typical Instantaneous Reverse Characteristics

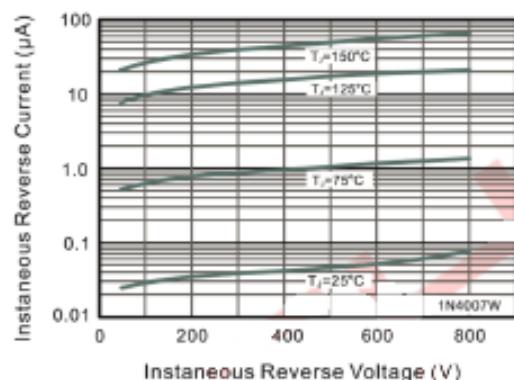


Fig.3 Typical Forward Characteristic

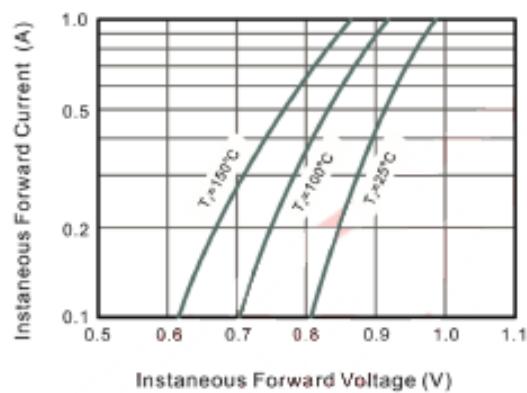


Fig.4 Typical Junction Capacitance


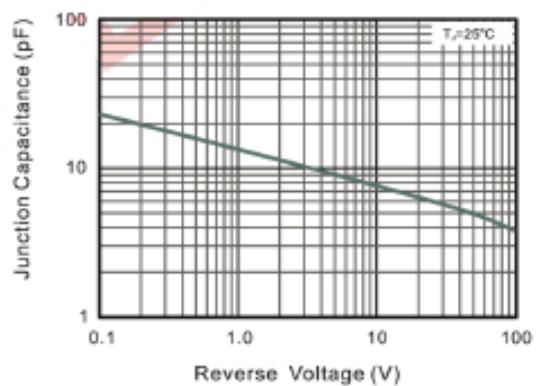


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

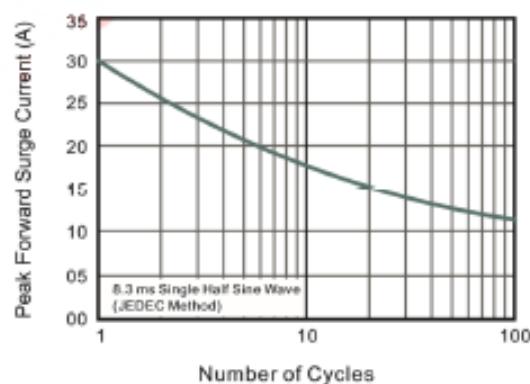


dated: 04/2016

Rev:1.0

1N4001FL THRU 1N4007FL

PACKAGE OUTLINE

SOD-123FL

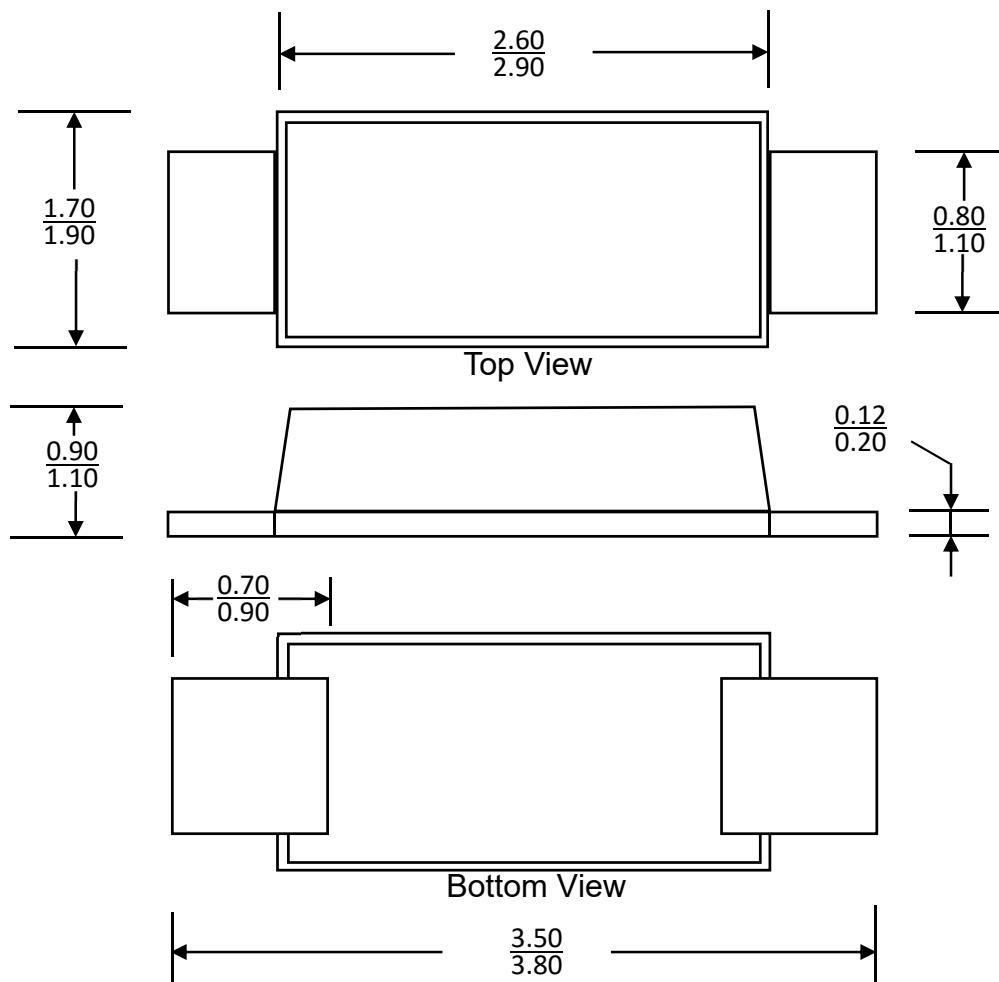

Dimensions in millimeters

ORDERING INFORMATION

Device	Package	Shipping
1N4001FL thru 1N4007FL	SOD-123FL	3,000/Tape & Reel (7 inches)

Dated: 04/2016
Rev:1.0