

# 1N4933AT THRU 1N4937AT

## FAST RECOVERY RECTIFIERS

Reverse Voltage - 50 to 600 Volts

Forward Current - 1.0 Ampere

### FEATURES

- ▶ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ▶ Fast switching for high efficiency
- ▶ Low reverse leakage
- ▶ High forward surge current capability
- ▶ High temperature soldering guaranteed:  
260°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### MECHANICAL DATA


**Case:** DO-41 molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.012 ounce, 0.33 grams

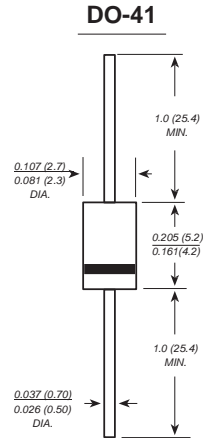

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	1N 4933AT	1N 4934AT	1N 4935AT	1N 4936AT	1N 4937AT	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0					A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30.0					A
Maximum instantaneous forward voltage at 1.0A	$V_F$	1.2					V
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	$I_R$	5.0 50.0					$\mu\text{A}$
Maximum reverse recovery time (NOTE 1)	$t_{rr}$	250					ns
Typical junction capacitance (NOTE 2)	$C_J$	15.0					pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	50.0					$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150					$^\circ\text{C}$

**Note:** 1. Reverse recovery condition  $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

Dated: 05/2018

Rev: 1.0

# 1N4933AT THRU 1N4937AT

## RATINGS AND CHARACTERISTIC CURVES

