

# 1N5817FL THRU 1N5819FL

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

Forward Current-1.0A

Reverse Voltage-20V to 40V

### FEATURES


- ◆ For surface mount applications
- ◆ High forward surge current capability
- ◆ Low power loss, high efficiency
- ◆ Metal silicon junction, majority carriers conduction

### MECHANICAL DATA

- ◆ Case: SOD-123FL molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750 , Method 2026
- ◆ Weight: Approximated 0.015 grams

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

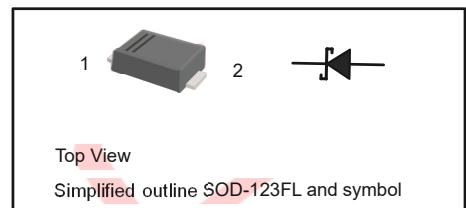

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	1N5817FL	1N5818FL	1N5819FL	UNIT
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	V
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	V
Maximum Average Forward Rectified Current at T <sub>C</sub> =75°C	I <sub>F(AV)</sub>	1.0			A
Peak Forward Surge Current (Note1)	I <sub>FSM</sub>	25			A
Maximum Forward Voltage at 1.0 A 3.0 A	V <sub>F</sub>	0.45 0.75	0.55 0.875	0.6 0.9	V
Maximum DC Reverse Current at Rated DC Blocking Voltage at T <sub>A</sub> =25°C T <sub>A</sub> =100°C	I <sub>R</sub>	1 10			mA
Typical Junction Capacitance (Note2)	C <sub>J</sub>	110			pF
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150			°C

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4 V D.C.

Dated: 04/2016  
Rev:1.0

# 1N5817FL THRU 1N5819FL

Fig.1 Forward Current Derating Curve

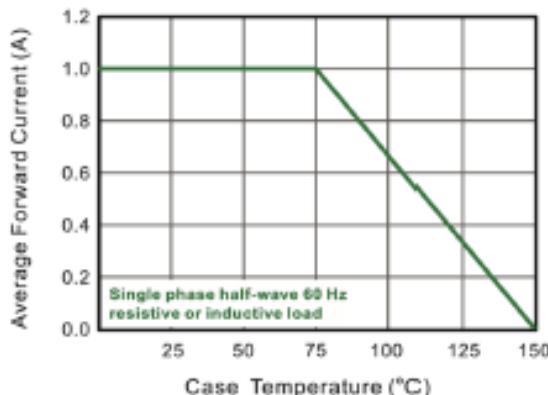


Fig.2 Typical Reverse Characteristics

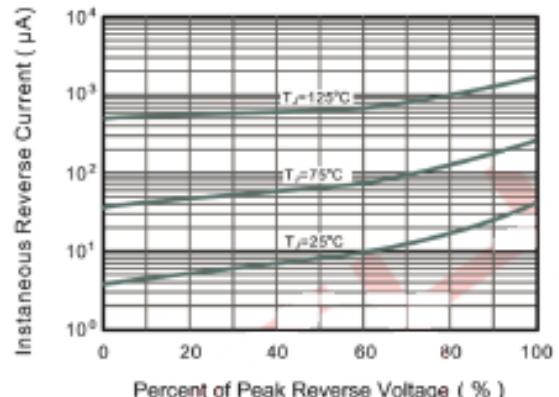


Fig.3 Typical Forward Characteristic

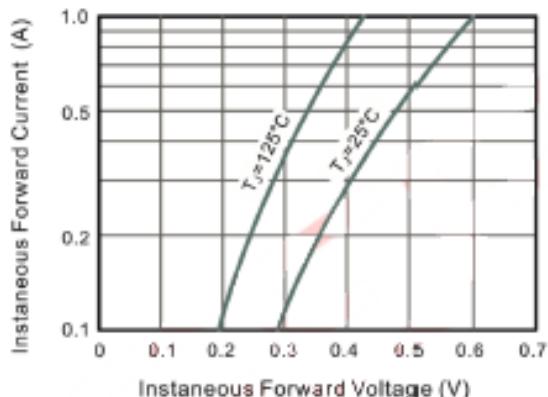


Fig.4 Typical Junction Capacitance


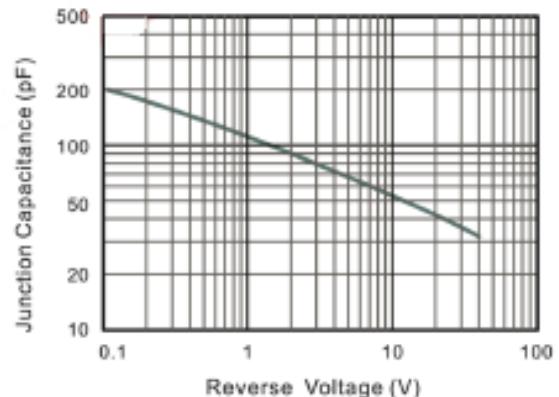


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current.

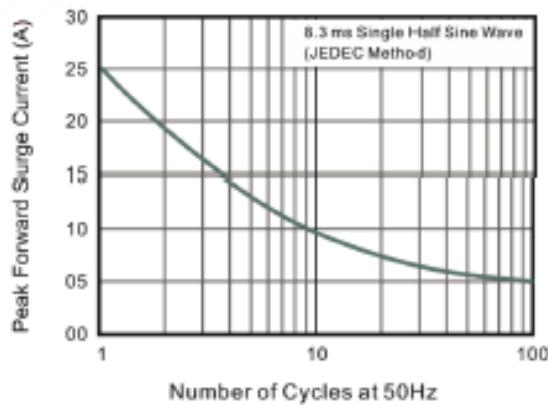


Dated: 04/2016  
Rev:1.0

# 1N5817FL THRU 1N5819FL

## PACKAGE OUTLINE

SOD-123FL

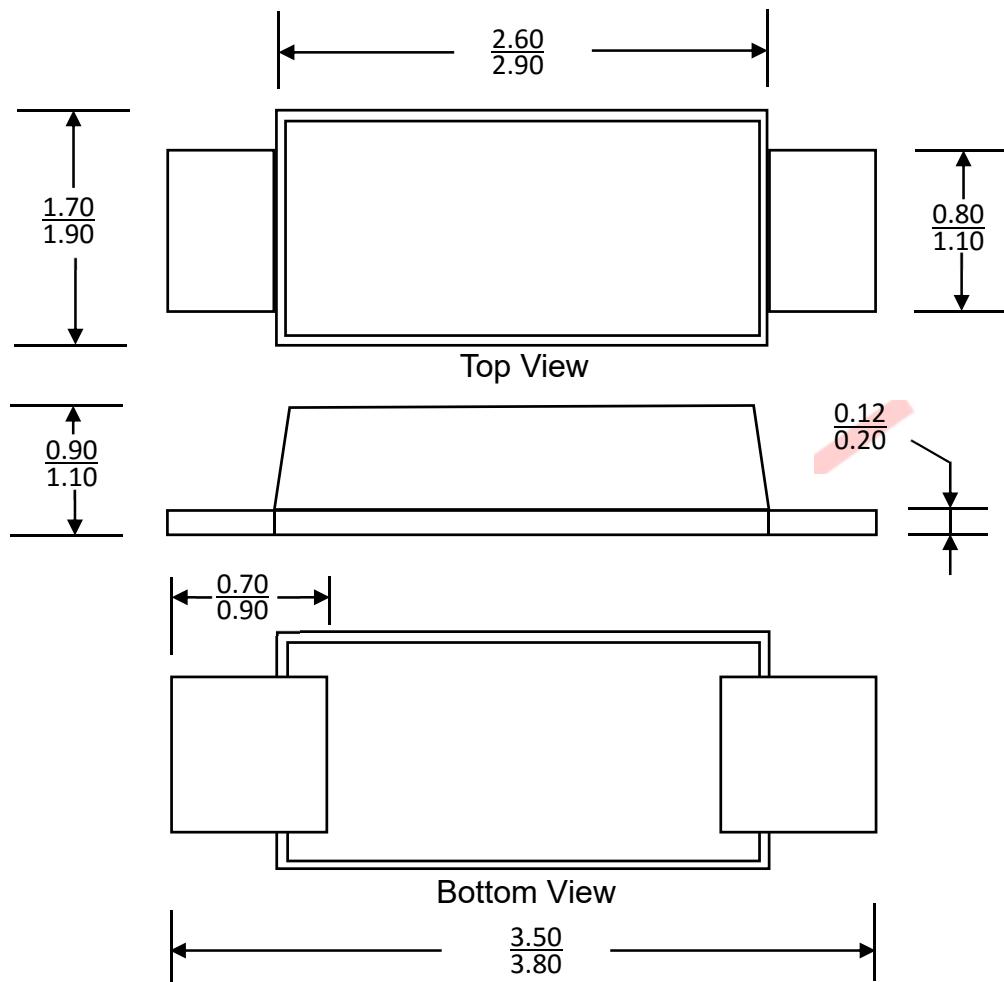

Dimensions in millimeters

## ORDERING INFORMATION

Device	Package	Shipping
1N5817FL 1N5818FL 1N5819FL	SOD-123FL	3,000/Tape & Reel (7 inches)

Dated: 04/2016  
Rev:1.0