

BZT52C2V0AT THRU BZT52C75AT

Surface Mount Zener Diodes

Power Dissipation: 500mW Zener Voltage: 2.0V to 75V

FEATURES


- ◆ Total power dissipation: Max. 500mW.
- ◆ Wide zener reverse voltage range 2.0 V to 75V.
- ◆ Small plastic package suitable for surface mounted design.

MECHANICAL DATA

- ◆ Case: SOD-123
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 16mg 0.00056oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

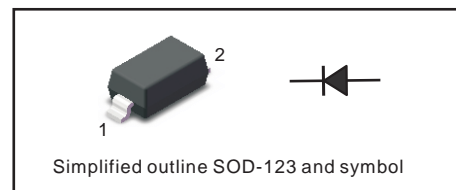

Absolute Maximum Ratings And Characteristics (Ta = 25 °C)

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	500	mW
Forward Voltage at $I_F = 10$ mA	V_F	0.9	V
Typical thermal resistance juncting to ambient ⁽¹⁾	$R_{\theta JA}$	305	°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150	°C

(1) Thermal resistance from junction to ambient at P.C.B. mounted with 7.6mm X 9.4mm X 0.87mm copper areas pads.

Fig.1 Maximum Continuous Power Derating


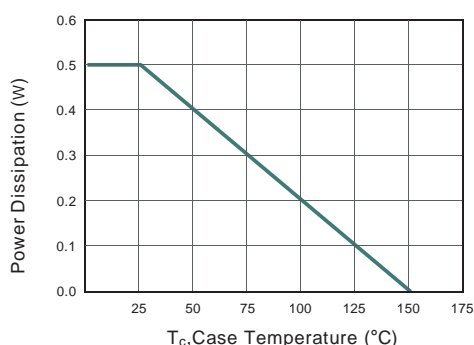


Fig.2 Typical Transient Thermal Impedance

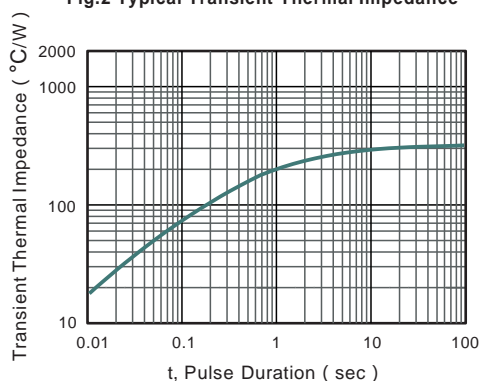

Dated:01/2018
Rev: 1.0

BZT52C2V0AT THRU BZT52C75AT

Characteristics at Ta = 25°C

Type	Marking	Zener Voltage Range ⁽²⁾				Maximum Zener ⁽³⁾ Impedance				Reverse Current ⁽²⁾	
		V _{ZT} (at I _{ZT})			I _{ZT}	Z _{ZT} @I _{ZT}	I _{ZT}	Z _{ZK} @I _{ZK}	I _{ZK}	I _R	@V _R
		Min (V)	Nom (V)	Max (V)	(mA)	(Ω)	(mA)	(Ω)	(mA)	μA	V
BZT52C2V0AT	WY	1.91	2.0	2.09	5	100	5	600	1	150	1.0
BZT52C2V4AT	WX	2.2	2.4	2.6	5	100	5	600	1	50	1.0
BZT52C2V7AT	W1	2.5	2.7	2.9	5	100	5	600	1	20	1.0
BZT52C3V0AT	W2	2.8	3.0	3.2	5	95	5	600	1	10	1.0
BZT52C3V3AT	W3	3.1	3.3	3.5	5	95	5	600	1	5.0	1.0
BZT52C3V6AT	W4	3.4	3.6	3.8	5	90	5	600	1	5.0	1.0
BZT52C3V9AT	W5	3.7	3.9	4.1	5	90	5	600	1	3.0	1.0
BZT52C4V3AT	W6	4	4.3	4.6	5	90	5	600	1	3.0	1.0
BZT52C4V7AT	W7	4.4	4.7	5	5	80	5	500	1	3.0	2.0
BZT52C5V1AT	W8	4.8	5.1	5.4	5	60	5	480	1	2.0	2.0
BZT52C5V6AT	W9	5.2	5.6	6	5	40	5	400	1	1.0	2.0
BZT52C6V2AT	WA	5.8	6.2	6.6	5	10	5	150	1	3.0	4.0
BZT52C6V8AT	WB	6.4	6.8	7.2	5	15	5	80	1	2.0	4.0
BZT52C7V5AT	WC	7	7.5	7.9	5	15	5	80	1	1.0	5.0
BZT52C8V2AT	WD	7.7	8.2	8.7	5	15	5	80	1	0.7	5.0
BZT52C9V1AT	WE	8.5	9.1	9.6	5	15	5	100	1	0.5	6.0
BZT52C10AT	WF	9.4	10	10.6	5	20	5	150	1	0.2	7.0
BZT52C11AT	WG	10.4	11	11.6	5	20	5	150	1	0.1	8.0
BZT52C12AT	WH	11.4	12	12.7	5	25	5	150	1	0.1	8.0
BZT52C13AT	WI	12.4	13	14.1	5	30	5	170	1	0.1	8.0
BZT52C15AT	WJ	13.8	15	15.6	5	30	5	200	1	0.1	10.5
BZT52C16AT	WK	15.3	16	17.1	5	40	5	200	1	0.1	11.2
BZT52C18AT	WL	16.8	18	19.1	5	45	5	225	1	0.1	12.6
BZT52C20AT	WM	18.8	20	21.2	5	55	5	225	1	0.1	14.0
BZT52C22AT	WN	20.8	22	23.3	5	55	5	250	1	0.1	15.4
BZT52C24AT	WO	22.8	24	25.6	5	70	5	250	1	0.1	16.8
BZT52C27AT	WP	25.1	27	28.9	2	80	2	300	0.5	0.1	18.9
BZT52C30AT	WQ	28	30	32	2	80	2	300	0.5	0.1	21.0
BZT52C33AT	WR	31	33	35	2	80	2	325	0.5	0.1	23.1
BZT52C36AT	WS	34	36	38	2	90	2	350	0.5	0.1	25.2
BZT52C39AT	WT	37	39	41	2	130	2	350	0.5	0.1	27.3
BZT52C43AT	6A	40	43	46	2.5	130	2	500	1	2	33
BZT52C47AT	6B	44	47	50	2.5	150	2	500	1	2	36
BZT52C51AT	6C	48	51	54	2.5	180	2	500	1	1	37
BZT52C56AT	6D	52	56	60	2.5	180	2	500	1	1	43
BZT52C62AT	6E	58	62	66	2.5	200	2	500	1	0.2	47
BZT52C68AT	6F	64	68	72	2.5	250	2	500	1	0.2	52
BZT52C75AT	6H	70	75	79	2.5	300	2	500	1	0.2	57

NOTES: (1) f=1KHz

(2) Short duration test pulse used to minimize self-heating effect.

(3) V_{ZT} is tested with pulses 20ms.


Dated:01/2018

Rev: 1.0


BZT52C2V0AT THRU BZT52C75AT

Package Outline

SOD-123

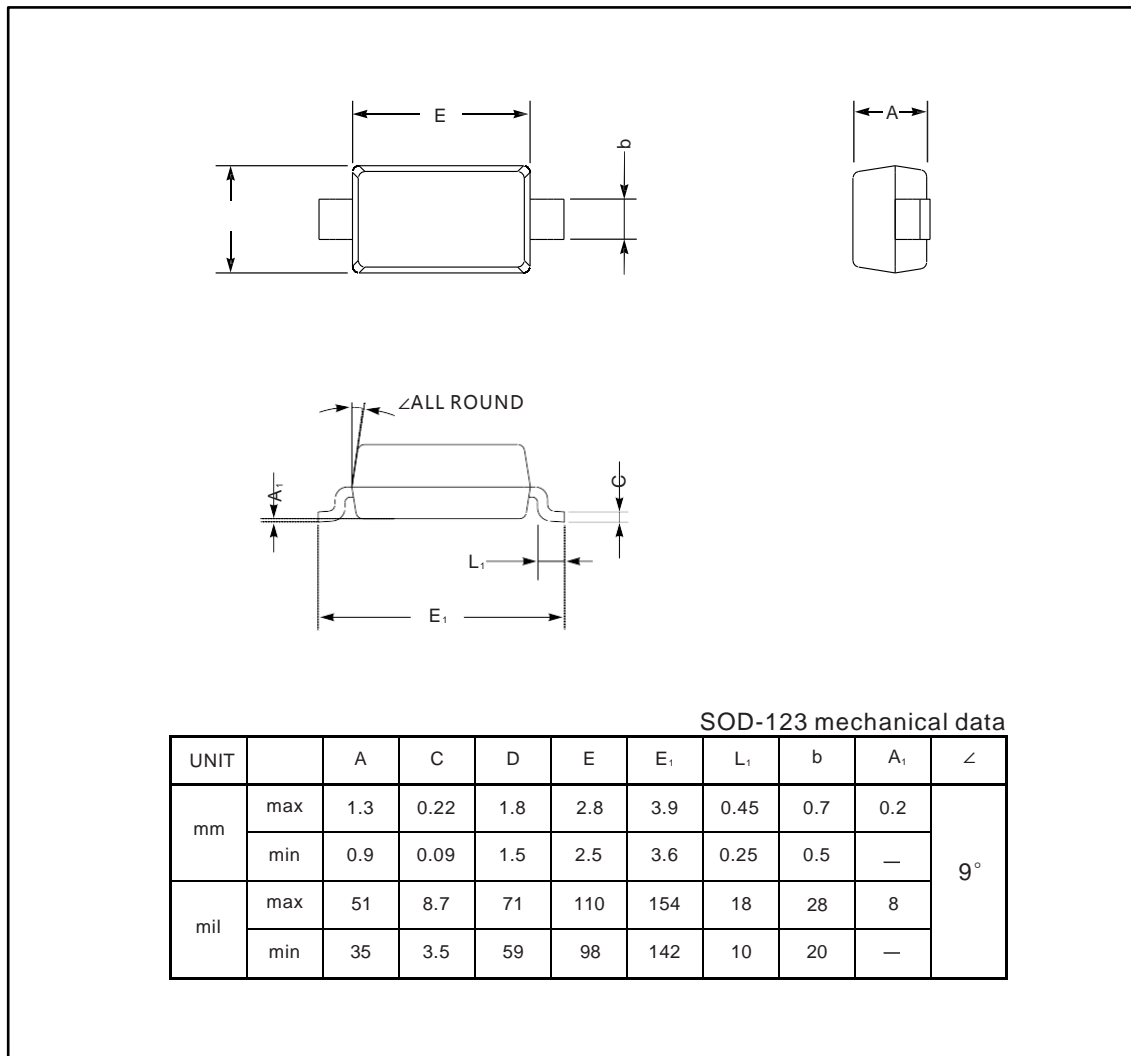

The recommended mounting pad size

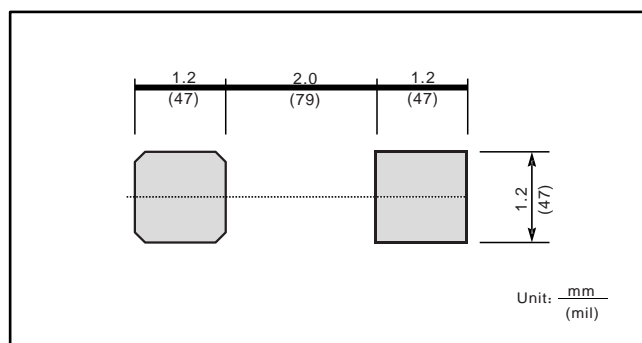

Dated:01/2018
Rev: 1.0