

ES2A-AT THRU ES2J-AT

SURFACE MOUNT SUPERFAST RECOVERY RECTIFIERS

Forward Current-2A

Reverse Voltage-50V to 600V

FEATURES


- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ Low profile package
- ◆ Superfast reverse recovery time
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

MECHANICAL DATA

- ◆ Case: SMA
- ◆ Terminals: Solderable per MIL-STD- 750, Method 2026

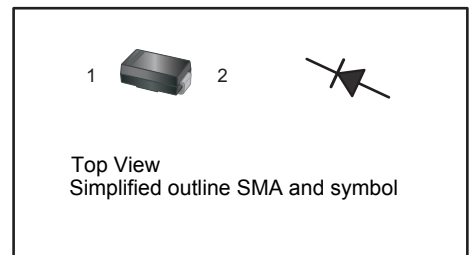

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	ES&A -AT	ES&B -AT	ES&C -AT	ES&D -AT	ES&E -AT	ES&G -AT	ES&J -AT	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current at T _C =125°C	I _{F(AV)}	2							A
Peak Forward Surge Current	I _{FSM}	50							A
Maximum Forward Voltage at 2.0 A	V _F	1				1.25		1.6	V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _A =25°C T _A =125°C	I _R	5				100			uA
Typical Junction Capacitance at V _R =4V, f=1MHz	C _J	40				pF			
Maximum Reverse Recovery Time (Note1)	T _{rr}	35				nS			
Typical Thermal Resistance (Note2)	R _{θJA}	60				°C/W			
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150							°C

Notes: 1. Measured at with I_F=0.5A, I_R=1A, I_{rr}=0.25A.


2. P.C.B. mounted with 1.0" X 1.0" (2.54 X2.54 cm) copper pad areas.

Dated: /201
Rev:1.0

ES2A-AT THRU ES2J-AT

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

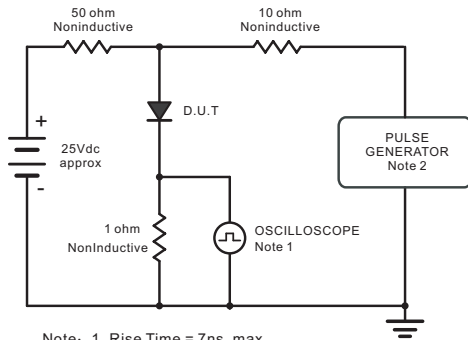

Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm, 22pF.
2. Rise Time = 10ns, max.
Source Impedance = 50 ohms.

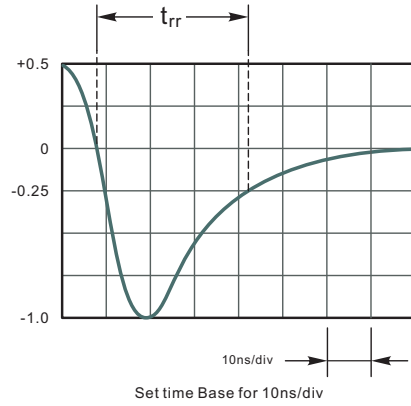


Fig.2 Maximum Average Forward Current Rating

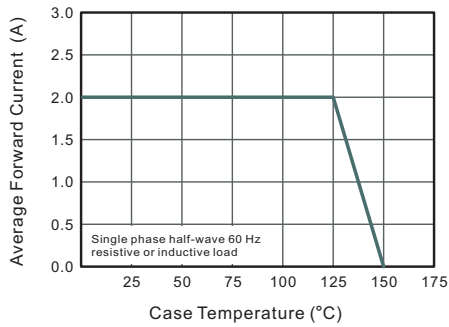


Fig.3 Typical Reverse Characteristics

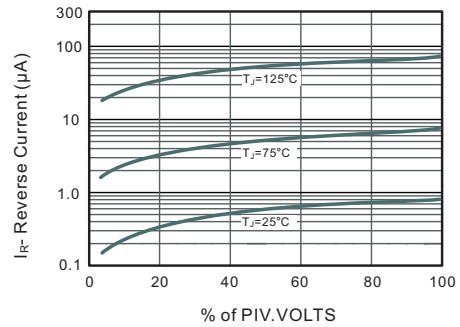


Fig.4 Typical Forward Characteristics

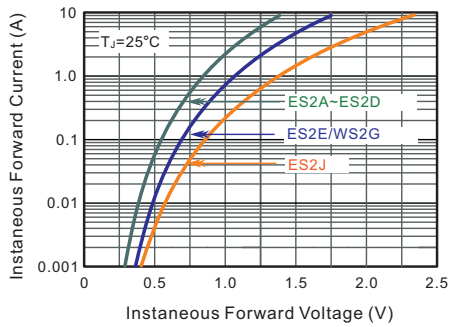


Fig.5 Typical Junction Capacitance


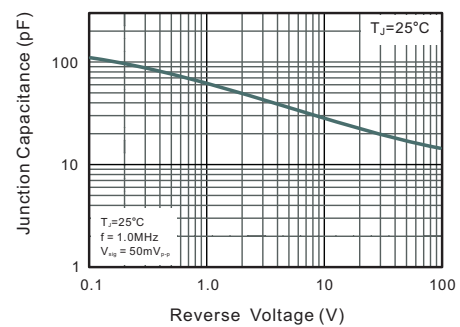



Fig.6 Maximum Non-Repetitive Peak Forward Surge Current

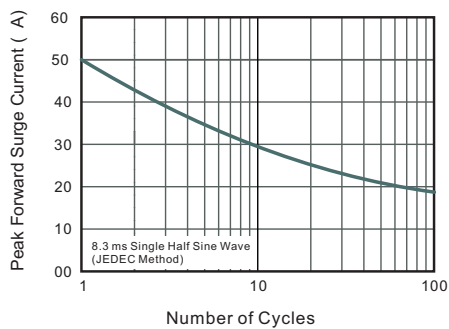

ES2A-AT THRU ES2J-AT

PACKAGE OUTLINE

SMA

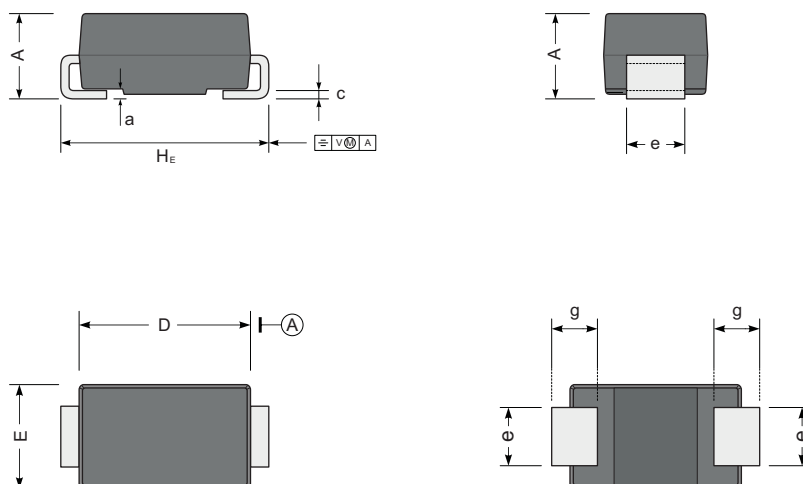

UNIT		A	D	E	H _E	c	e	g	a
mm	max	2.2	4.5	2.7	5.2	0.31	1.6	1.5	0.3
	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	
mil	max	87	181	106	205	12	63	59	12
	min	75	157	91	185	6	51	35	

Dated: 01/2018
Rev:1.0