

SPD9103AT

BI-DIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

Peak Pulse Current -20A

Reverse Breakdown Voltage-4.0V

Descriptions

The SPD9103AT is a low capacitance TVS (Transient Voltage Suppressor) array designed to protect high speed data interfaces. It has been specifically designed to protect sensitive electronic components which are connected to data and transmission lines from over-stress caused by Electrostatic Discharge (ESD), cable discharge events (CDE), lightning and other induced voltage surges.

The SPD9103AT incorporates low capacitance steering diodes that reduce the typical capacitance to 1pF per line.

The SPD9103AT may be used to provide ESD protection up to $\pm 30\text{kV}$ (contact discharge) according to IEC61000-4-2, and withstand peak pulse current up to 20A (8/20 μs) according to IEC61000-4-5.


The SPD9103AT is available in SOD-323 package. Standard products are Pb-free and Halogen-free.

Features

- ◆ Stand-off voltage: 3.3V Max.
- ◆ Transient protection for each line according to
- ◆ IEC61000-4-2 (ESD): $\pm 30\text{kV}$ (contact discharge)
- ◆ IEC61000-4-4 (EFT): 40A - 5/50ns
- ◆ IEC61000-4-5 (surge): 20A (8/20 μs).
- ◆ Low capacitance: $C_J = 1\text{pF}$ typ.
- ◆ Ultra-low leakage current: $I_R = 0.1\text{nA}$ typ.
- ◆ Low clamping voltage.
- ◆ Solid-state silicon technology

Applications


- ◆ 10/100/1000 Ethernet
- ◆ STB
- ◆ Router
- ◆ Networking
- ◆ Modem

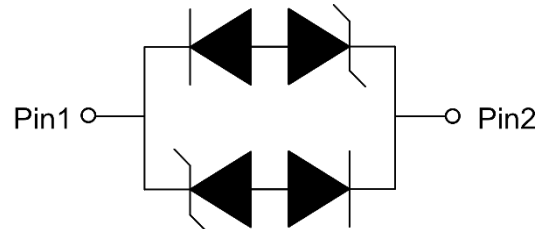

Circuit diagram



PIN assignment



SOD-323

SPD9103AT

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating	Unit
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{pk}	340	W
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	20	A
ESD According to IEC61000-4-2 Air Discharge	V_{ESD}	± 30	kV
ESD According to IEC61000-4-2 Contact Discharge		± 30	
Junction Temperature	T_J	125	$^{\circ}C$
Operating Temperature	T_{OP}	-40~85	$^{\circ}C$
Lead Temperature	T_L	260	$^{\circ}C$
Storage Temperature	T_{STG}	-55~150	$^{\circ}C$


ELECTRICAL CHARACTERISTICS

($T_A = 25^{\circ}C$, unless otherwise noted)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse Maximum Working Voltage	V_{RWM}				3.3	V
Reverse Leakage Current	I_R	$V_{RWM} = 3.3V$		0.1	100	nA
Reverse Breakdown Voltage	V_{BR}	$I_T = 1mA$	4.0			V
Clamping Voltage ^{NOTE 1}	V_{CL}	$I_{PP} = 1A, t_p = 8/20\mu s$			8	V
		$I_{PP} = 5A, t_p = 8/20\mu s$			10	V
		$I_{PP} = 20A, t_p = 8/20\mu s$			17	V
Junction Capacitance	C_J	$V_R = 0V, f = 1MHz$ I/O to I/O		1.0	1.5	pF

NOTE 1: According to IEC61000-4-5.


Dated: 11/2016
Rev:1.0

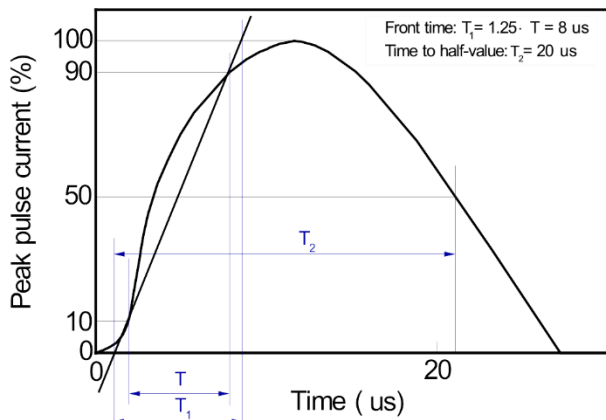


8/20 μs Waveform per IEC61000-4-5

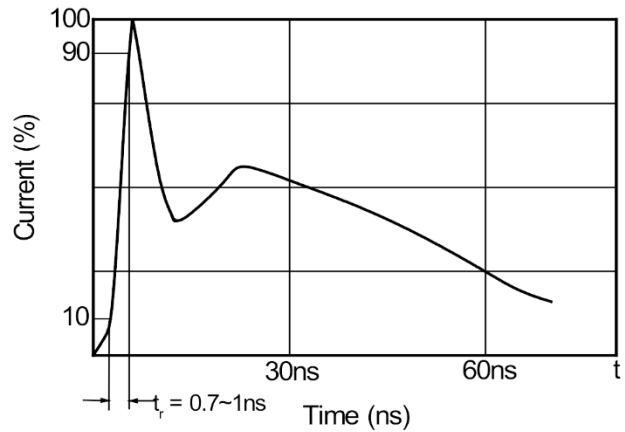


Contact discharge current waveform per IEC61000-4-2

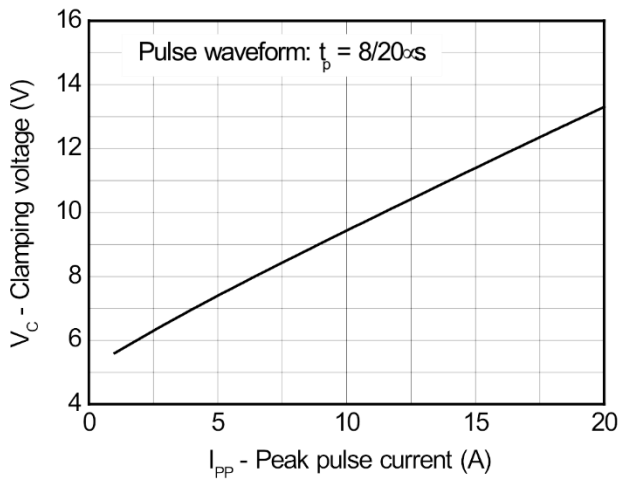


Clamping voltage vs. Peak pulse current

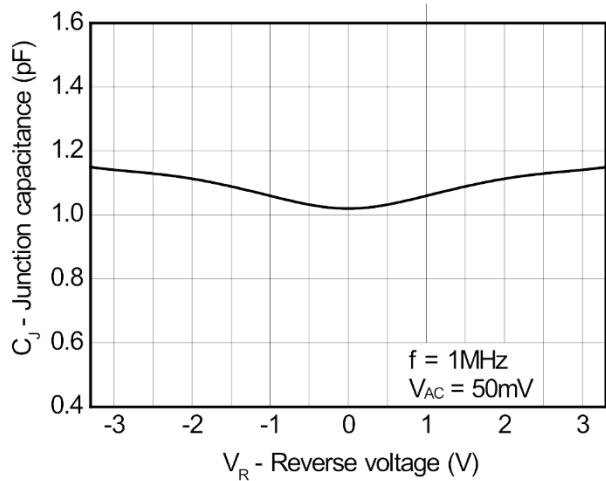

Capacitance vs. Reverse voltage

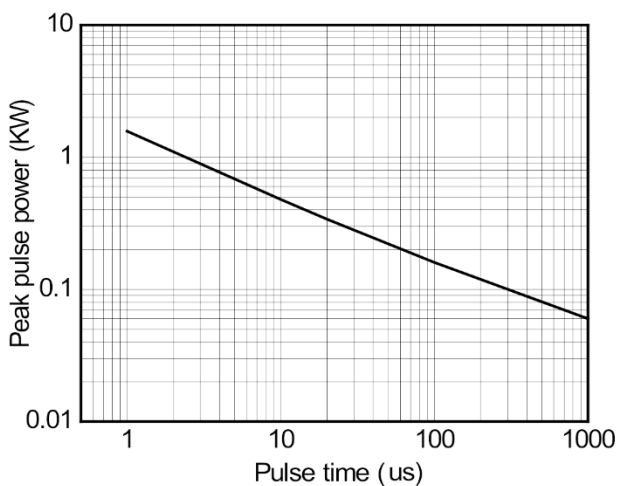

Non-repetitive peak pulse power vs. Pulse time

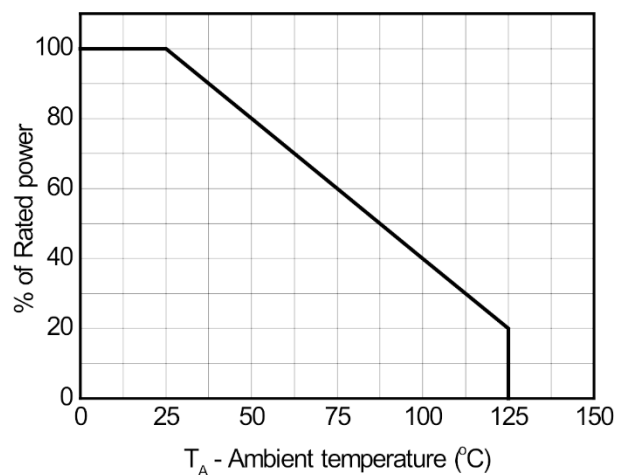


Power derating vs. Ambient temperature

SPD9103AT

PACKGE OUTLINE

SOD-323

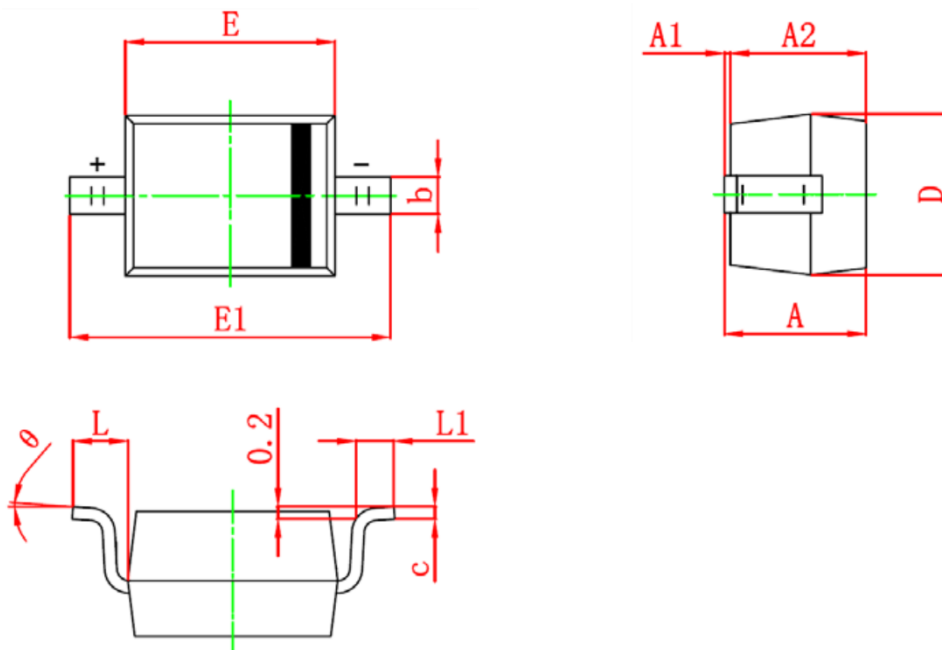

SOD-323 mechanical data

Symbol	Dimensions in millimeters		Dimensions in Inches	
	Min.	Max.	Min.	Max.
A	0.800	1.000	0.031	0.039
A1	0.000	0.100	0.000	0.004
A2	0.800	0.900	0.031	0.035
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.500	2.700	0.098	0.106
L	0.475 REF		0.019 REF	
L1	0.250	0.400	0.010	0.016
θ	0°	8°	0°	8°

ORDERING INFORMATION

Device	Package	Shipping
SPD9103AT	SOD-323	3000/Tape&Reel

Dated: 11/2016
Rev:1.0