

SS22BF-AT THRU SS220BF-AT

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

Forward Current-2A


Reverse Voltage-20V to 200V

FEATURES

- ◆ For surface mount applications
- ◆ High forward surge current capability
- ◆ Low power loss,high efficiency
- ◆ Metal silicon junction,majority carriers conduction

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

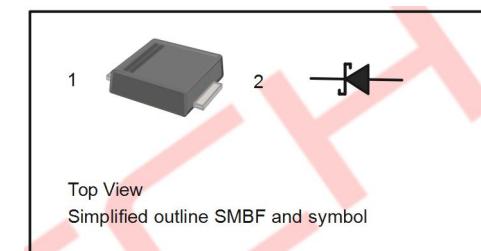

MECHANICAL DATA

- ◆ Case: SMBF molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750 , Method 2026
- ◆ Weight: Approximated 0.057 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	SS22BF -AT	SS24BF -AT	SS26BF -AT	SS28BF -AT	SS210BF -AT	SS212BF -AT	SS215BF -AT	SS220BF -AT	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	V _{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V _{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	I _{F(AV)}						2.0			A
Peak Forward Surge Current(Note1)	I _{FSM}			55				45		A
Max Instantaneous Forward Voltage at 2 A	V _F		0.55		0.70		0.85		0.95	V
Maximum DC Reverse Current at Rated DC Blocking Voltage Ta = 25°C Ta = 100°C	I _R		0.5	5			0.3	3		mA
Typical Junction Capacitance(Note2)	C _J		220				110			pF
Typical Thermal Resistance(Note3)	R _{θJA}				75					°C/W
Operating Junction Temperature Range	T _J				-55 ~ +125					°C
Storage Temperature Range	T _{STG}				-55 ~ +150					°C

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4 V D.C.

3. P.C.B. mounted with 2.0" X 2.0" (5cm X 5 cm) copper pad areas.

Dated: 10/2016

Rev:1.0

SS22BF-AT THRU SS220BF-AT

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

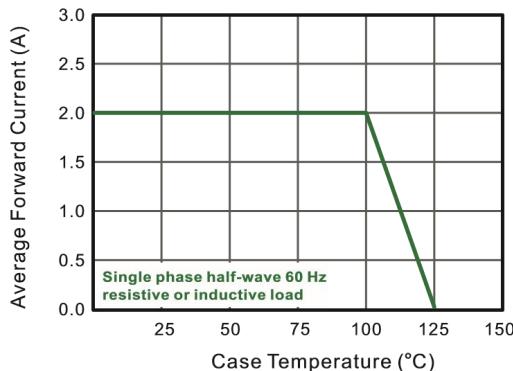


Fig.2 Typical Reverse Characteristics

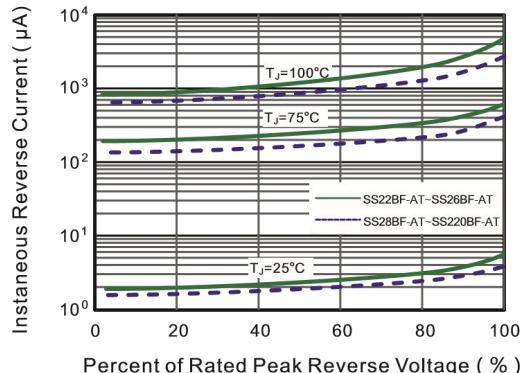


Fig.3 Typical Forward Characteristic

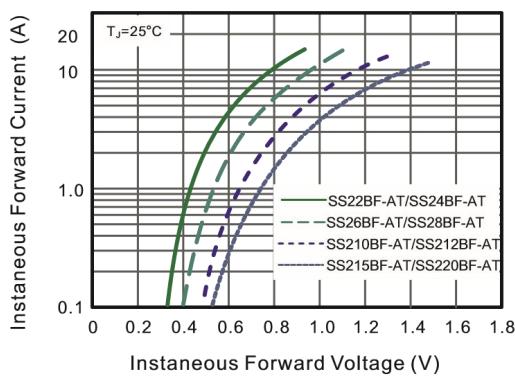


Fig.4 Typical Junction Capacitance

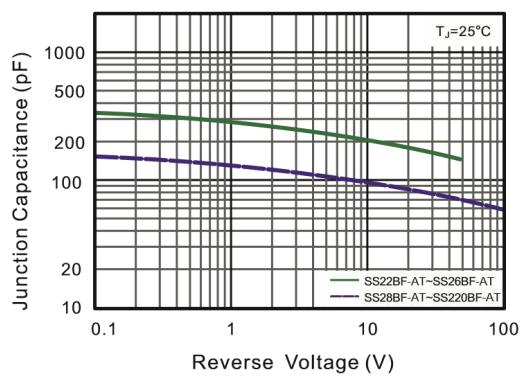


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


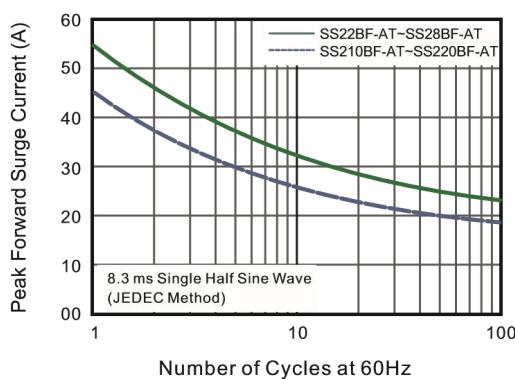


Fig.6- Typical Transient Thermal Impedance

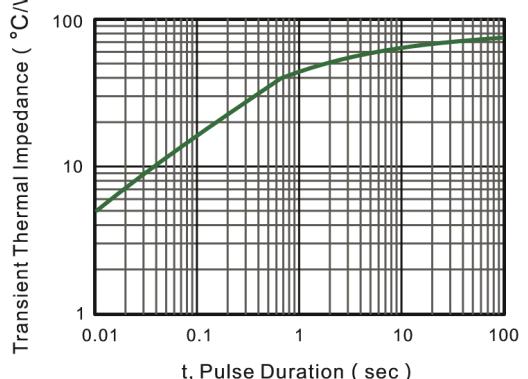


Dated: 10/2016
Rev:1.0

SS22BF-AT THRU SS220BF-AT

PACKAGE OUTLINE

SMBF

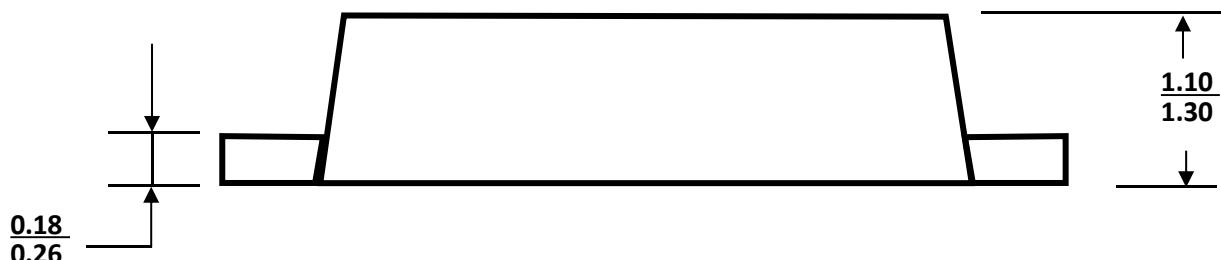

Dimensions in millimeters

ORDERING INFORMATION

Device	Package	Shipping
SS22BF-AT thru SS220BF-AT	SMBF	5,000/Tape & Reel (13 inches)

Dated: 10/2016

Rev:1.0