

TB34S-AT THRU TB320S-AT

SURFACE MOUNT SCHOTTKY BRIDGE RECTIFIERS

Forward Current-3.0A

Reverse Voltage-40V to 200V

FEATURES


- ◆ For surface mount applications
- ◆ High surge current capability

MECHANICAL DATA

- ◆ Case: ABS/LBF molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750 , Method 2026
- ◆ Weight: Approximated 0.088 grams

PINNING

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

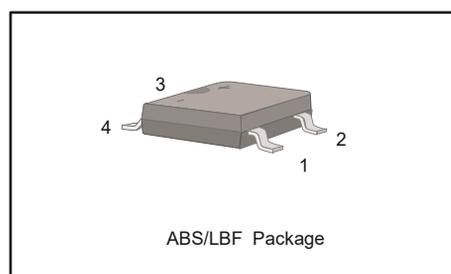

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	TB34S-AT	TB36S-AT	TB38S-AT	TB310S-AT	TB320S-AT	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	60	80	100	200	V
Maximum RMS Voltage	V_{RMS}	28	42	56	70	140	V
Maximum DC Blocking Voltage	V_{DC}	40	60	80	100	200	V
Maximum Average Forward Rectified Current at $T_C=90^\circ\text{C}$	$I_{F(AV)}$	3.0					A
Peak Forward Surge Current (Note1)	I_{FSM}	80		70			A
Maximum Forward Voltage at 3.0A	V_F	0.55	0.70	0.85		0.95	V
Maximum DC Reverse Current at Rated DC Blocking Voltage at $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	0.5 10	0.3 5				mA
Typical Junction Capacitance (Note2)	C_J	250	160				pF
Typical Thermal Resistance (Note3)	$R_{\theta JA}$	60					$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 to +125					$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150					$^\circ\text{C}$

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4 V D.V.

3. Mounted on 1.5" X 1.5" (3.81 X 3.81 cm) copper pad areas.

Dated: 05/2016

Rev:1.0

TB34S-AT THRU TB320S-AT

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

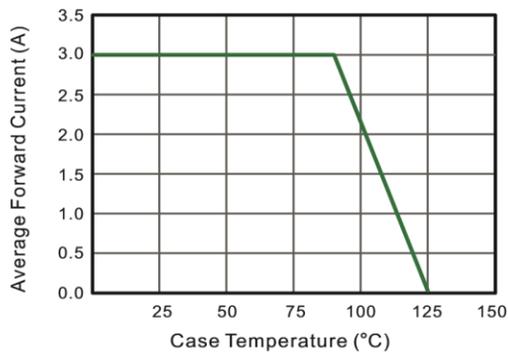


Fig.2 Typical Reverse Characteristics

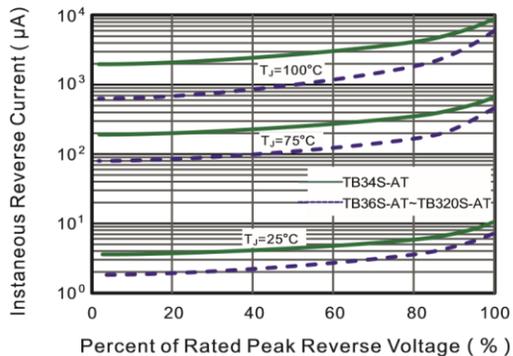


Fig.3 Typical Forward Characteristic

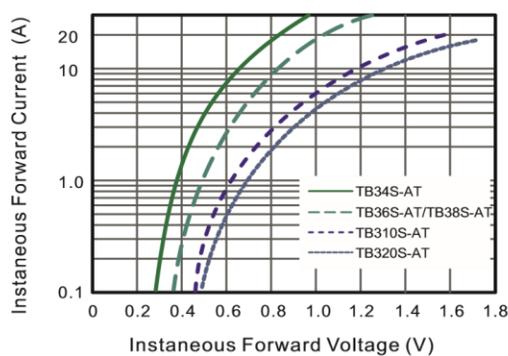


Fig.4 Typical Junction Capacitance


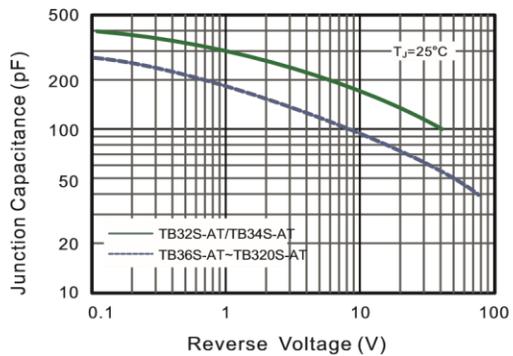



Fig.5 Maximum Non-Repetitive Forward Surge Current

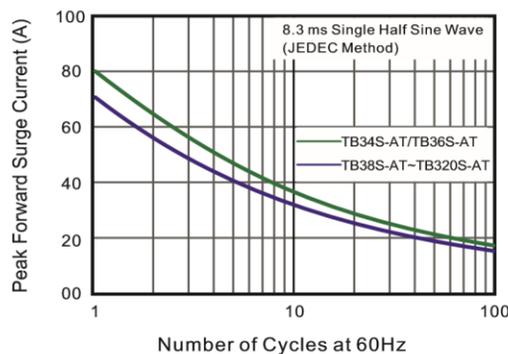

TB34S-AT THRU TB320S-AT

PACKAGE OUTLINE

ABS/LBF

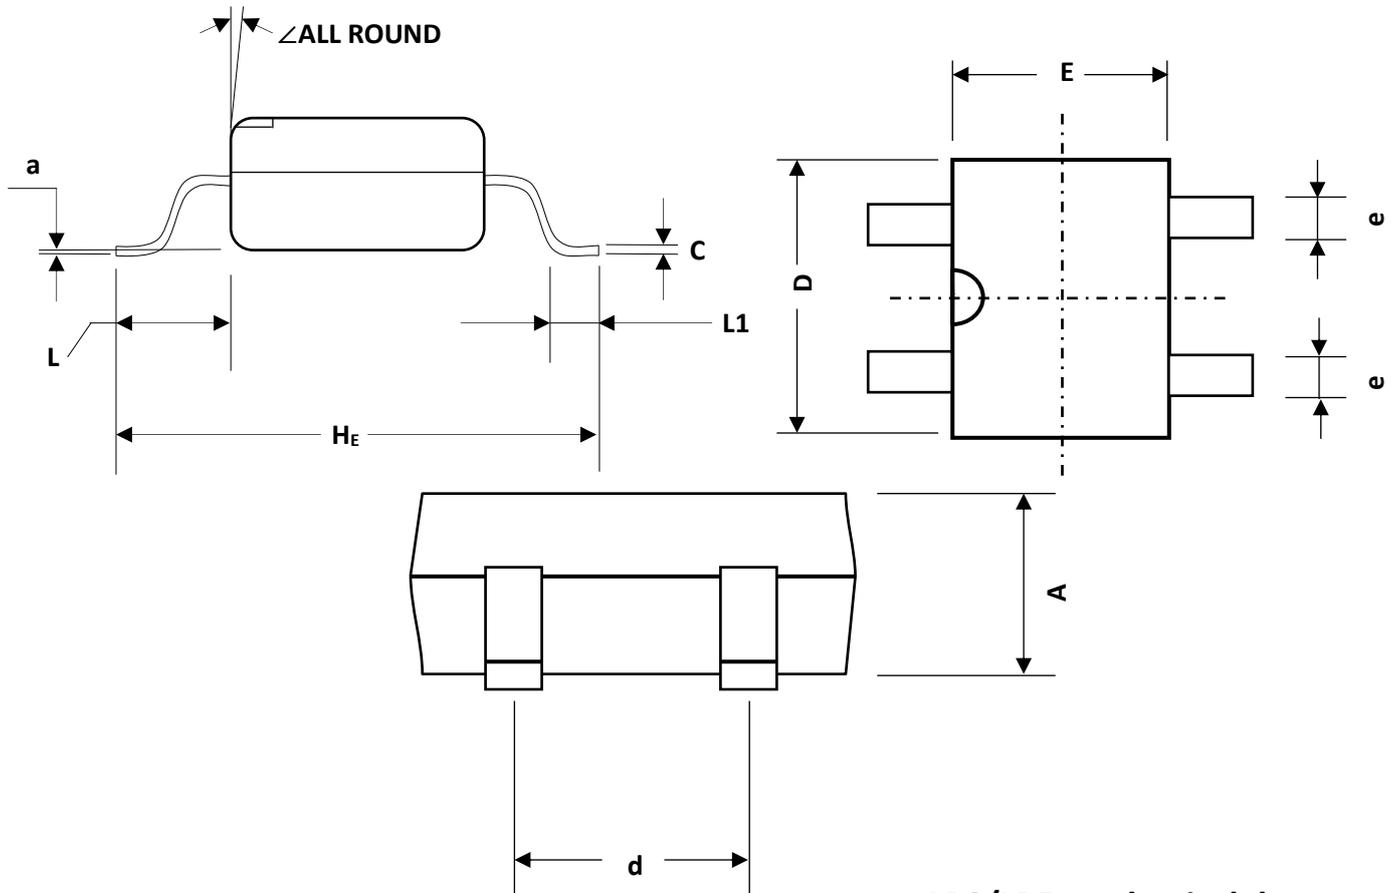

ABS/LBF mechanical data

UNIT		A	C	D	E	H_E	d	e	L	L_1	a	\angle
mm	max	1.5	0.22	5.2	4.5	6.4	4.2	0.7	0.95	0.6	0.2	7°
	min	1.3	0.15	4.9	4.2	6.0	3.8	0.5				
mil	max	59	8.7	205	177	252	165	28	37	24	8	
	min	51	5.9	193	166	236	150	20				

ORDERING INFORMATION

Device	Package	Shipping
TB34S-AT thru TB320S-AT	ABS/LBF	3,000/Tape & Reel (11 inches)
		5,000/ Tape & Reel (13 inches)

Dated: 05/2016
Rev:1.0