

US1A-AT THRU US1M-AT

SURFACE ULTRAFAST RECOVERY RECTIFIERS

Forward Current-1.0A

Reverse Voltage-50V to 1000V

FEATURES


- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ Low profile package
- ◆ Easy to pick and place
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- ◆ Case: SMA molded plastic body
- ◆ Terminals: Solderable per MIL-STD- 750, Method 2026
- ◆ Weight: Approximated 0.055 grams

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

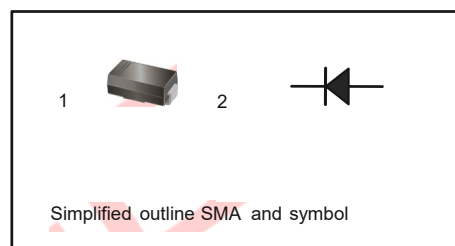

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	US1A-AT	US1B-AT	US1D-AT	US1G-AT	US1J-AT	US1K-AT	US1M-AT	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_C=125^\circ\text{C}$	$I_{F(AV)}$	1							A
Peak Forward Surge Current (Note1)	I_{FSM}	35							A
Maximum Forward Voltage at 1.0 A	V_F	1.0		1.3		1.65		V	
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	5 100							μA
Maximum Reverse Recovery Time (Note2)	T_{rr}	50				75			nS
Typical Thermal Resistance (Note3)	$R_{\theta JA}$	75							$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

3. P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Dated: 06/2016

Rev:1.0

US1A-AT THRU US1M-AT

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

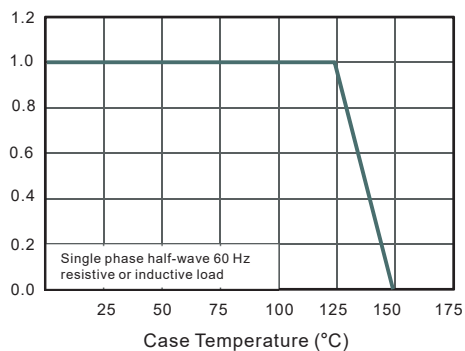


Fig.2 Typical Reverse Characteristics

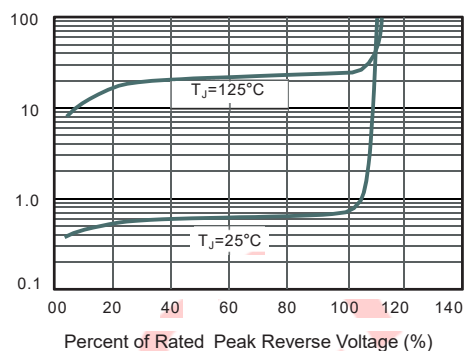


Fig.3 Typical Forward Characteristics


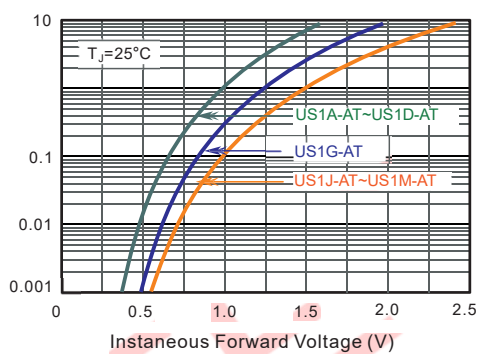



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

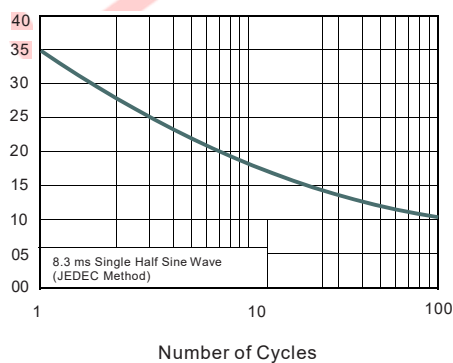

US1A-AT THRU US1M-AT

PACKAGE OUTLINE

SMA

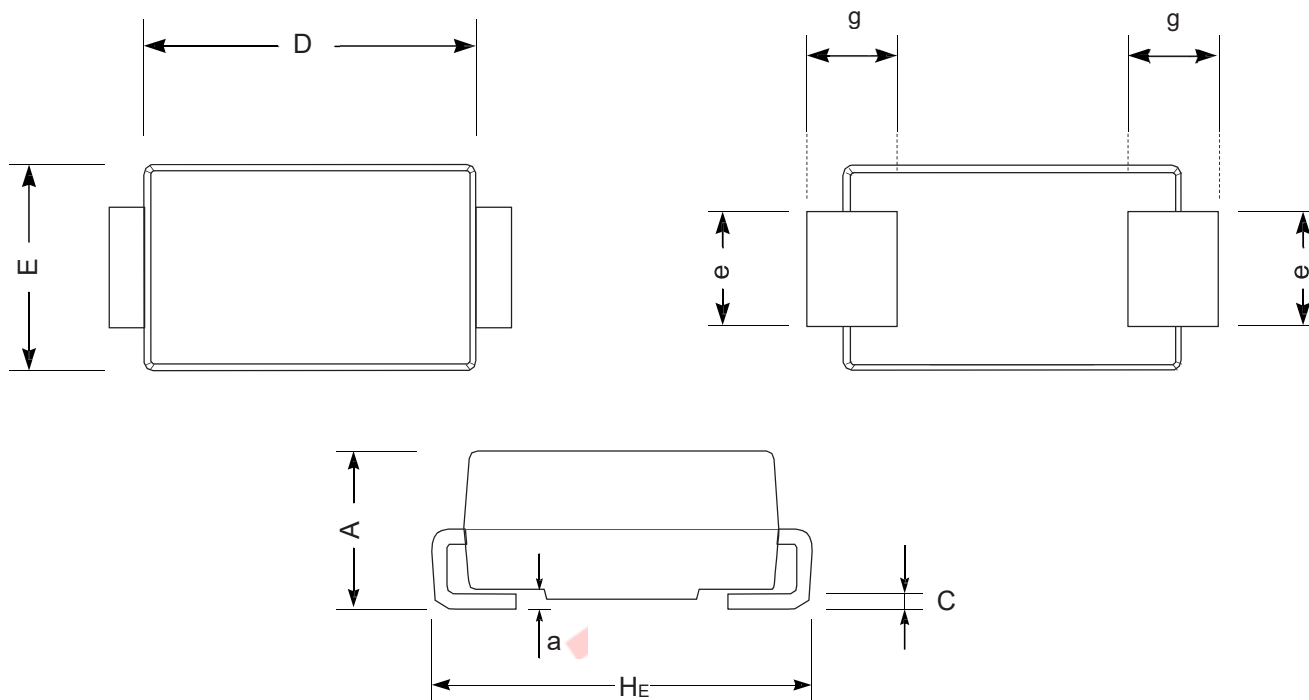

UNIT		A	D	E	HE	C	e	g	a
mm	max	2.2	4.5	2.7	5.2	0.31	1.6	1.5	0.3
	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	
mil	max	87	181	106	205	12	63	59	12
	min	75	157	91	185	6	51	35	

ORDERING INFORMATION

Device	Package	Shipping
US1A-AT thru US1M-AT	SMA	5,000/ Tape & Reel (13 inches)

Dated: 06/2016
Rev:1.0