

US1AFL-AT THRU US1MFL-AT

SURFACE ULTRAFAST RECOVERY RECTIFIERS

Forward Current-1A

Reverse Voltage-50V to 1000V

FEATURES


- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ Low profile package
- ◆ Easy to pick and place
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

MECHANICAL DATA

- ◆ Case: SOD-123FL molded plastic body
- ◆ Terminals: Solderable per MIL-STD- 750, Method 2026
- ◆ Weight: Approximated 0.015 grams

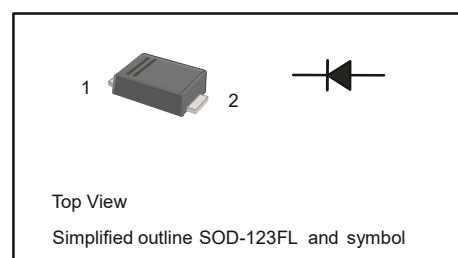

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	US1AFL -AT	US1BFL -AT	US1DFL -AT	US1GFL -AT	US1JFL -AT	US1KFL -AT	US1MFL -AT	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_C=125^\circ\text{C}$	$I_{F(AV)}$	1							A
Peak Forward Surge Current(Note1)	I_{FSM}	30							A
Maximum Forward Voltage at 1.0 A	V_F	1.0			1.3	1.65		V	
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	5 100							μA
Maximum Reverse Recovery Time (Note2)	T_{rr}	50				75			nS
Typical Thermal Resistance (Note3)	$R_{\theta JA}$	80							$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at with $I_F=0.5\text{A}$, $I_{rr}=0.25\text{A}$.

3. P.C.B. mounted with 2.0" X 2.0" (5cm X 5 cm) copper pad areas.

Dated: 04/2016

Rev:1.0

US1AFL-AT THRU US1MFL-AT

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

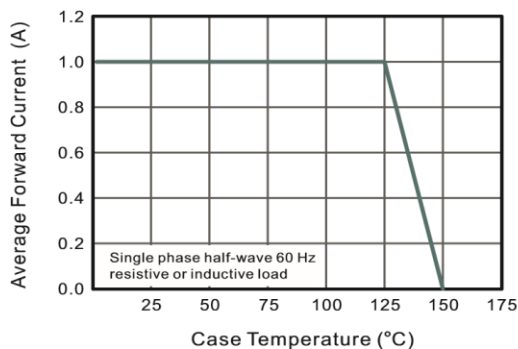


Fig.2 Typical Reverse Characteristics

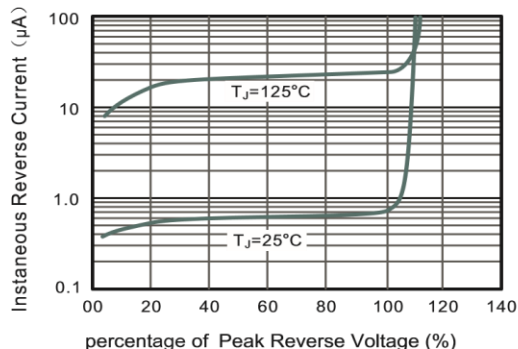


Fig.3 Typical Forward Characteristics


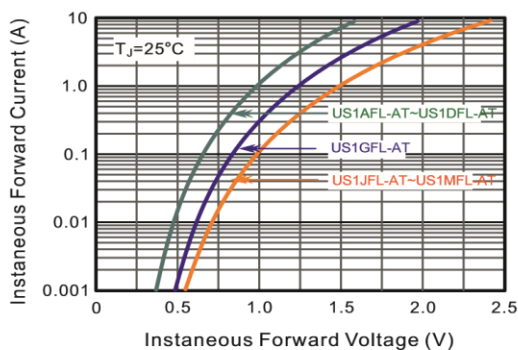



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

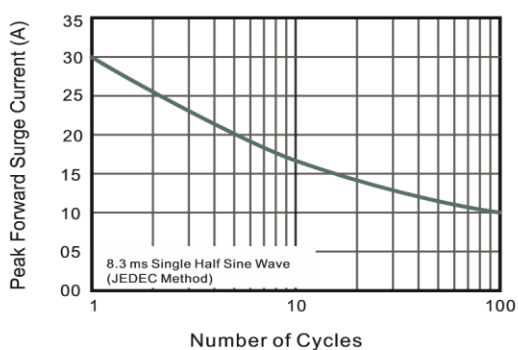

US1AFL-AT THRU US1MFL-AT

PACKAGE OUTLINE

SOD-123FL

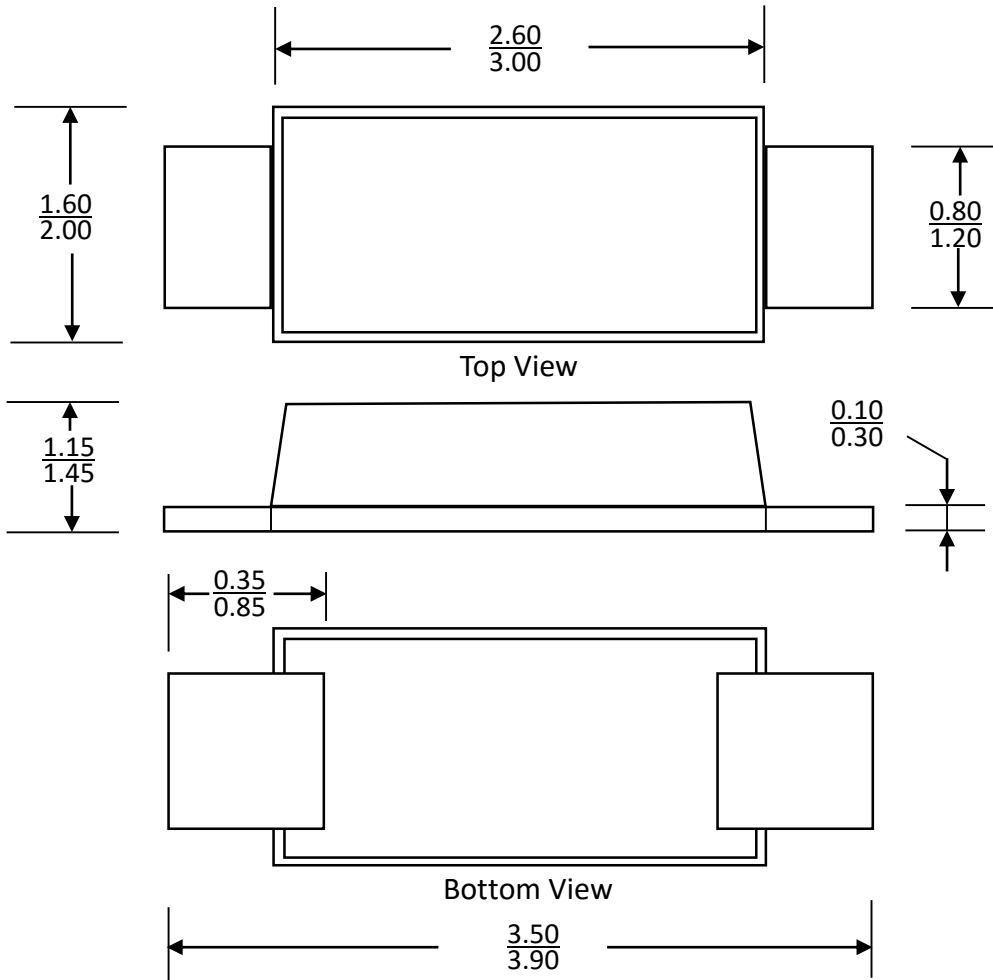

Dimensions in millimeters

ORDERING INFORMATION

Device	Package	Shipping
US1AFL-AT thru US1MFL-AT	SOD-123FL	3,000/Tape & Reel (7 inches)

Dated: 04/2016

Rev:1.0