

# US3ABF-AT THRU US3MBF-AT

## SURFACE ULTRAFAST RECOVERY RECTIFIERS

Forward Current-3.0A

Reverse Voltage-50V to 1000V

### FEATURES


- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ Low profile package
- ◆ Easy to pick and place
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

### MECHANICAL DATA

- ◆ Case: SMBF molded plastic body
- ◆ Terminals: Solderable per MIL-STD- 750, Method 2026
- ◆ Weight: Approximated 0.057 grams

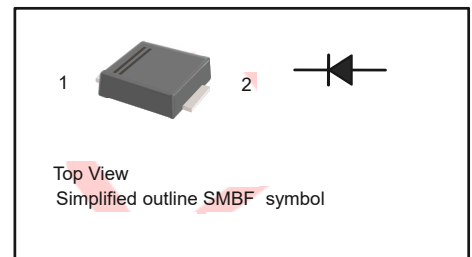

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	US3ABF -AT	US3BBF -AT	US3DBF -AT	US3GBF -AT	US3JBF -AT	US3KBF -AT	US3MBF -AT	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_C=125^\circ\text{C}$	$I_{F(AV)}$	3.0							A
Peak Forward Surge Current (Note1)	$I_{FSM}$	100							A
Maximum Forward Voltage at 3.0 A	$V_F$	1.0			1.3	1.68			V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	$I_R$	5 100							$\mu\text{A}$
Maximum Reverse Recovery Time (Note2)	$T_{rr}$	50				75			nS
Typical Thermal Resistance (Note3)	$R_{\theta JA}$ $R_{\theta JC}$	45 15							$^\circ\text{C/W}$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at with  $I_F=0.5\text{A}$ ,  $I_R=1\text{A}$ ,  $I_{rr}=0.25\text{A}$ .

3. P.C.B. mounted with 2.0" X 2.0" (5cm X 5 cm) copper pad areas.

Dated: 06/2016

Rev:1.0

# US3ABF-AT THRU US3MBF-AT

## RATINGS AND CHARACTERISTIC CURVES

Fig.1 Maximum Average Forward Current Rating

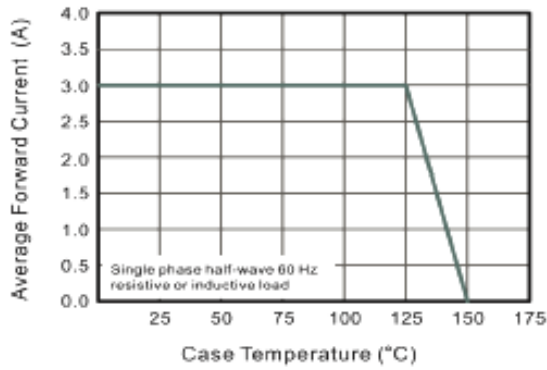


Fig.2 Typical Reverse Characteristics

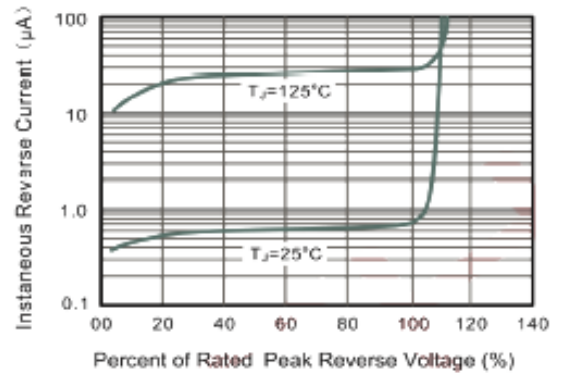


Fig.3 Typical Forward Characteristics


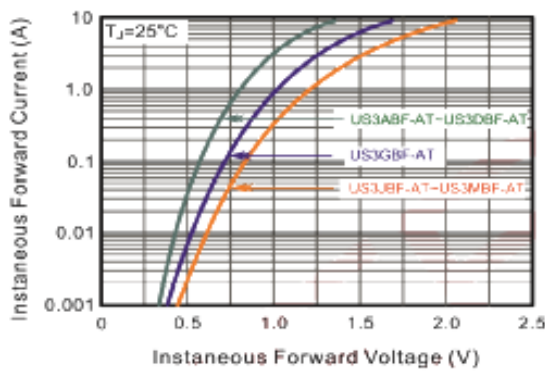



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

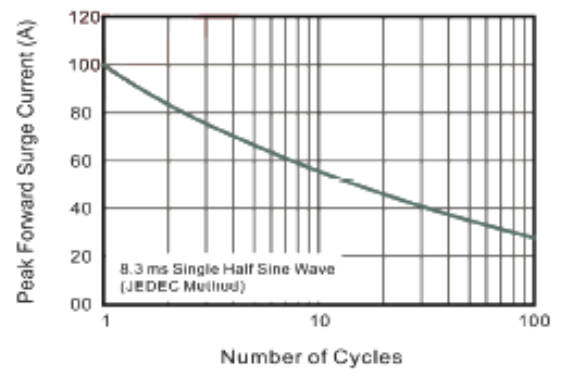

# US3ABF-AT THRU US3MBF-AT

## PACKAGE OUTLINE

SMBF

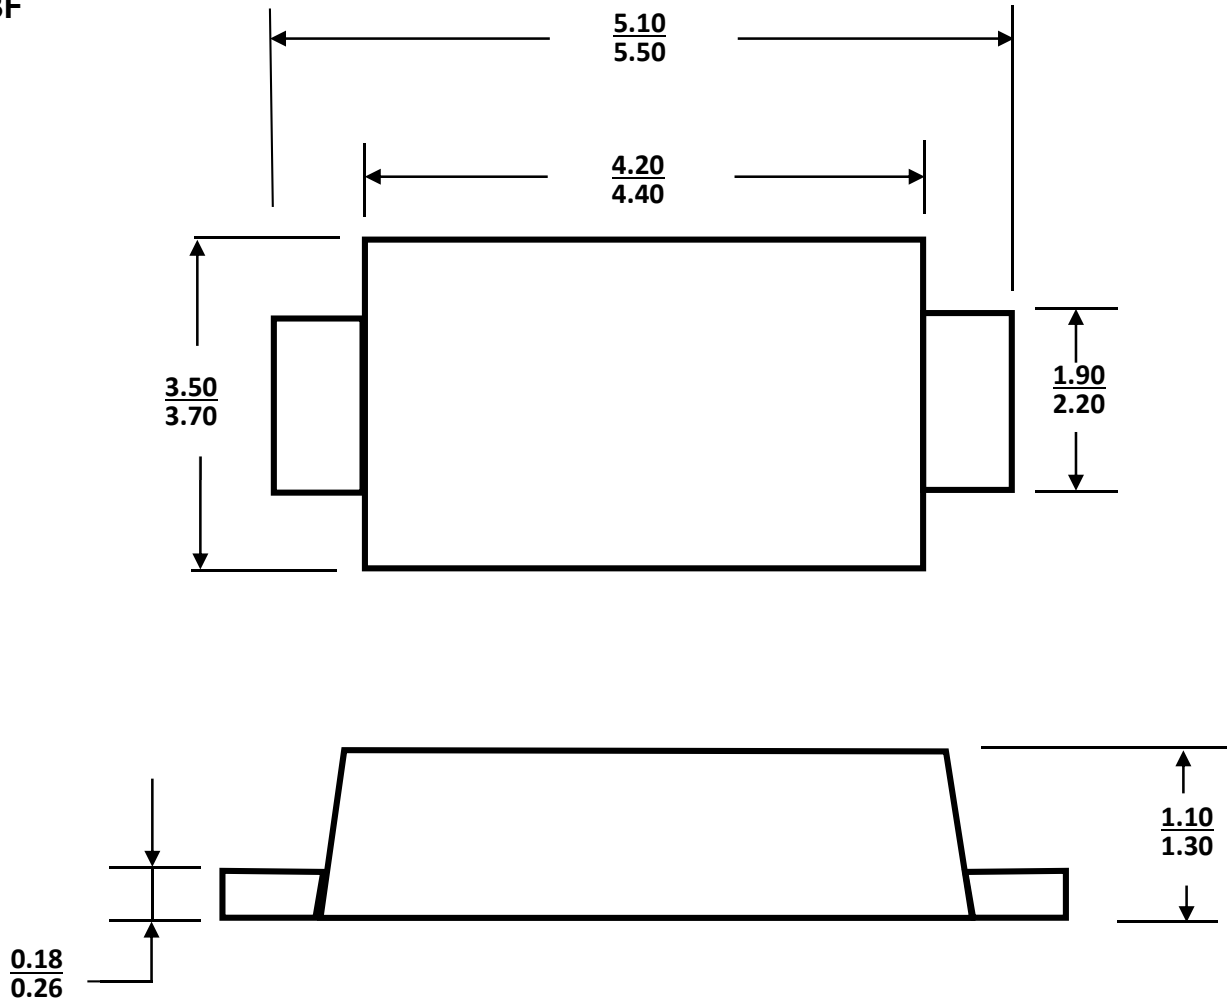

Dimensions in millimeters

### ORDERING INFORMATION

Device	Package	Shipping
US3ABF-AT thru US3MBF-AT	SMBF	5,000/ Tape & Reel (13 inches)

Dated: 06/2016

Rev:1.0